
INSTALLATION GUIDE

Fitting the display

For the Van Beijck Dewi, Lyra and Slim displays.

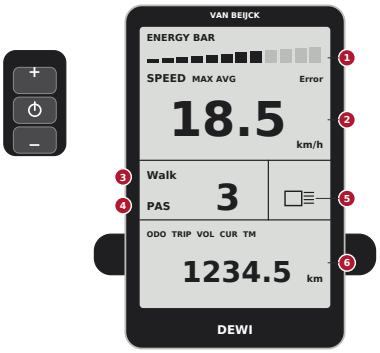

In the box

- Display (Dewi, Lyra or Slim)
- Mounting hardware (Dewi with separate bracket)
- Display cable

What you need

- Allen key 3 mm
- Cable ties and side cutters

> **Safety first**
> Disconnect the battery before working on cables, the controller or the motor. Make sure the bike stands firmly, preferably in a work stand. In doubt? Have the installation done by a bike shop or a Van Beijck dealer.

Step by step

1 Attach the bracket to the display (Dewi only)

Fix the bracket to the back of the display with the small Allen bolts supplied. On the Lyra and Slim the bracket is already fitted.

2 Fit the display on the handlebar

Place the display where you can see it well and reach the buttons easily. Carefully tighten the clamp bolt with the 3 mm Allen key.

> **Not too tight**
> Do not overtighten the clamp. Heat and cold make the material expand and contract; a clamp that is too tight can damage the handlebar or the display.

3 Keep the cables free

The cables from the display must not be trapped between the display, the bracket and the handlebar.

4 Route the cables along the handlebar

Turn the handlebar fully left and right: the cables must keep enough slack. Then fix the cable neatly to the handlebar or stem with a cable tie.

5 Connect

Push the display cable firmly onto the display's waterproof plug. Route the cable along the frame to the controller and connect it there (white plug).

Check after fitting

- ☐ Display is secure but not too tight
- ☐ Plugs are pushed fully together
- ☐ Cables have slack at full steering lock
- ☐ Display switches on with the on/off button