
INSTALLATION GUIDE

Fitting the throttle

For the Van Beijck thumb throttle and half-twist throttle.

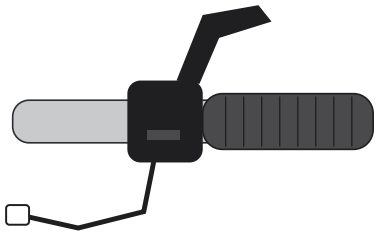

In the box

- Throttle (thumb or half-twist)

What you need

- Allen key 3 mm
- Possibly soapy water or compressed air to loosen the grip

Safety first
Disconnect the battery before working on cables, the controller or the motor. Make sure the bike stands firmly, preferably in a work stand. In doubt? Have the installation done by a bike shop or a Van Beijck dealer.

Step by step

1 Remove the grip

Remove the grip on the side where the throttle will go.

Grip stuck?
A little soapy water or compressed air under the grip makes it much easier.

2 Fit the throttle

Slide the throttle onto the handlebar and put it in a comfortable position. The brake lever and shifter must not get in the way. Tighten the bolt with the 3 mm Allen key; the throttle must no longer be able to turn.

3 Refit the seal and grip

Slide the supplied plastic seal into the throttle (if included). Refit the grip, right up against the throttle, and check that it is secure.

4 Route and connect the cable

Route the cable neatly along the handlebar and stem to the controller and connect it (black plug). Turn the handlebar fully left and right: the cable must keep enough slack.

Check after fitting

- ☐ Throttle does not turn on the handlebar
- ☐ Cable has slack at full steering lock
- ☐ Grip is secure
- ☐ Throttle springs back by itself